




Circular straight silencer

SLGU 150



Dimensions

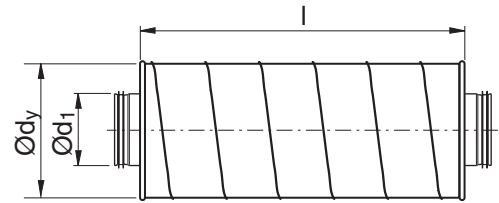

Description

Insulation thickness 150 mm.

Used when you need particularly good attenuation at low frequencies (125 and 250 Hz). Otherwise equivalent to SLGU 100.

For general information about the silencer's design, please refer to page 132.

Ordering example

SLGU 160 1000 150

Product
 Dimension Ød_1
 Length l
 Insulation thickness

Ød_1 nom	l mm	Attenuation in dB for centre frequency Hz								Ød_y mm	m kg
		63	125	250	500	1k	2k	4k	8k		
80	1000	11	26	22	27	50	55	47	27	410	15,1
100	1000	6	25	36	42	59	53	47	28	410	15,7
125	1000	10	22	34	38	51	50	40	25	465	17,7
125	1200	11	21	36	40	62	55	46	27	465	20,9
160	1000	6	16	28	40	51	52	28	20	465	18,6
160	1200	7	17	33	44	58	56	32	21	465	22,1
200	1000	4	14	24	32	45	36	24	21	510	21,9
200	1200	7	15	25	36	49	42	26	22	510	25,9
250	1000	4	12	22	31	37	31	18	20	580	25,1
250	1200	7	15	26	36	41	34	20	21	580	29,8

Technical data

